

# air winches





capacity 7500-10,000 lb  
(3402-4536 kg)

## specifications

Series		K6UA	K6UAL	K6U	K6UL	K6UL36
ANSI Half Drum Rating	lb	7500	7500	10,000	10,000	10,000
	kg	3402	3402	4536	4536	4536
Rope Speed at Rated Load	ft/min	70	70	55	55	55
	m/min	21	21	17	17	17
Size and Maximum Length of Wire Rope in Feet and Metres (Diam.)	5/8"	716	1436	716	1436	2119
	16mm	218	438	218	438	646
	3/4"	535	1070	535	1070	1583
	19mm	163	326	163	326	483
	7/8"	373	775	373	775	1159
	22mm	114	236	114	236	353
Weight without Wire Rope	lb	1315	1550	1315	1550	2050
	kg	596	703	596	703	930

Performance figures are at 90 psi (620 kPa) air inlet pressure.

## performance curves

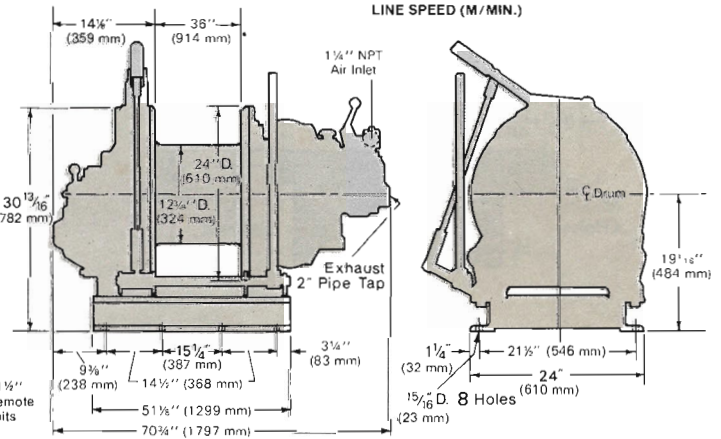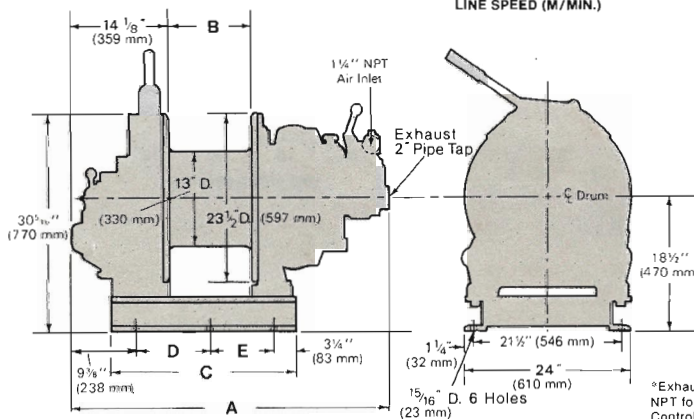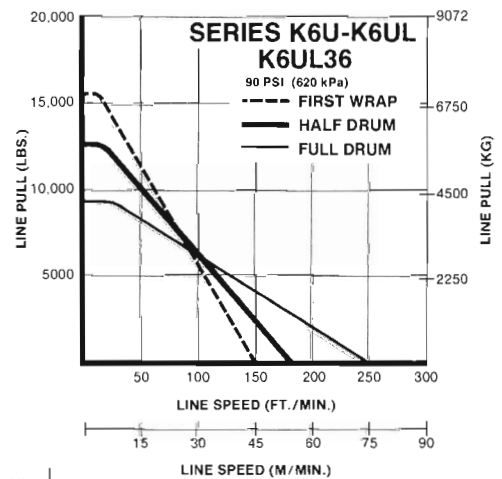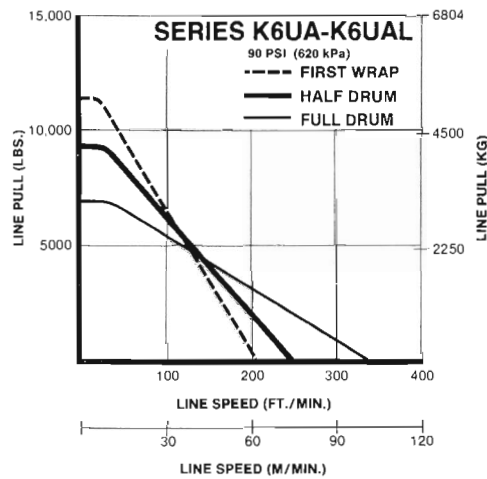

## Equipment at Extra Price

Series	K6UA, K6UAL, K6U, K6UL, K6UL36, 12UWB1141, 12UWB1142
Description	Part Number
Air Strainer	K4U-A267AT
Exhaust Muffler	KU-674
Lubricator	NL-24

## dimensions

Series	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
K6U	46 1/2	1181	12	305	26 3/8	683	10 3/4	273	9 1/4	235
K6UA	46 1/2	1181	12	305	26 3/8	683	10 3/4	273	9 1/4	235
K6UL	58 1/2	1486	24	610	38 3/8	987	16 3/4	426	15 1/4	387
K6UAL	58 1/2	1486	24	610	38 3/8	987	16 3/4	426	15 1/4	387

**INGERSOLL-RAND**