

# air winches




capacity 4000-5000 lb  
(1814-2268 kg)

## specifications

Series		K4U	K4UL	K5U	K5UL
ANSI Half Drum Rating	lb	4000	4000	5000	5000
	kg	1814	1814	2268	2268
Rope Speed at Rated Load	ft/min	125	125	115	115
	m/min	38	38	35	35
Size and Maximum Length of Wire Rope in Feet and Metres (Diam.)	7/16"	851	1741	851	1741
	11mm	259	531	259	531
	1/2"	713	1427	713	1427
	13mm	217	435	217	435
	5/8"	457	913	457	913
	16mm	139	278	139	278
Weight without Wire Rope	lb	850	940	890	980
	kg	386	426	404	445

Performance figures are at 90 psi (620 kPa) air inlet pressure.

## performance curves

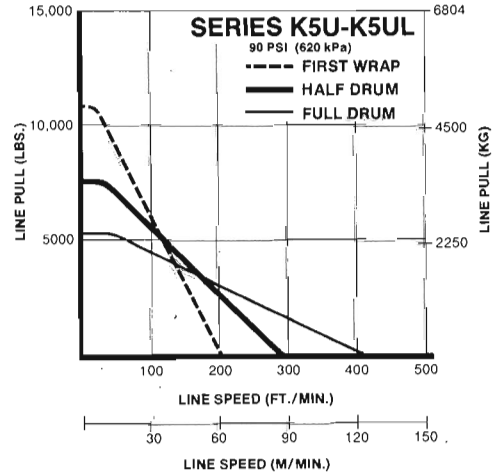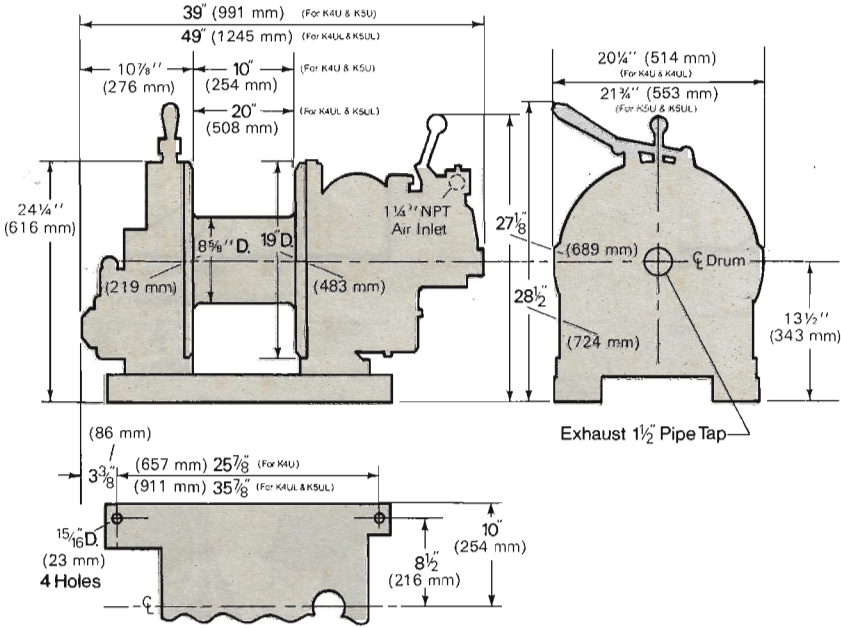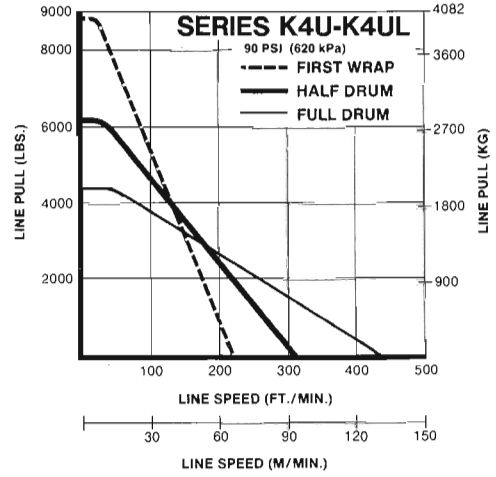

## Equipment at Extra Price

Series	HU	HUL, HU40, HUL40	H5U, H5UL, K4U, K4UL, K5U, K5UL
Description	Part Number		
Air Strainer	HU-A267AT	HU-A267AT	K4U-A267AT
* Exhaust Muffler	KU-674	KU-674	KU-674
Lubricator	NL-16	NL-16	NL-24

\*Requires use of No. KKM-286 Nipple and No. HU-677 Coupling.

**INGERSOLL-RAND**